



## LCD Display 1000W Portable Power Station Solar Generator With 50/60Hz Output Frequency

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: MINKO
- Certification: CE, ROHS
- Model Number: Portable Power Station-Q1000
- Minimum Order Quantity: 5 pieces
- Price: negotiation
- Packaging Details: L210xW85xH52 (mm)
- Delivery Time: 8 -10 working days
- Payment Terms: T/T, Western Union, MoneyGram, Paypal, Skrill, Transferwise
- Supply Ability: 1000000 pieces per month



### Product Specification

- Rated Power AC: 1000W
- Capacity: 1008Wh
- Power Indicate: LCD Display
- Solar Charging Input: 400W Max
- AC Fully Charging Time: About 2-3H
- Housing Material: ABS+PC
- Operation Humidity: 10%~90%
- Highlight: 50hz Rechargeable Portable Power Station, 60hz Rechargeable Portable Power Station, 1008wh camping power station



### More Images



for more products please visit us on [evstationcharger.com](http://evstationcharger.com)

## Product Description

### LCD Display 1000W Portable Power Station Solar Generator With 50/60Hz Output Frequency

#### Description of Portable Power Station

Portable power station is equipped with 1008Wh LiFePO4 Battery pack, which contains upgraded chip, supports fast charging function and more than 3000 recycling times. Pure Sine Wave technology AC outlets deliver stable and safe power, without damage and reduces audible and electrical noise.

#### Features:

Bidirectional fast charge technology  
UL car grade safer lithium iron phosphate cycle life 3000+  
super inverter technology  
UPS uninterrupted power supply  
1000W rated output  
sufficient large capacity 1 KWH electricity shape IP Armor warrior  
smaller volume, lighter weight and more portable than other

**Apply to:** Home emergency, small household appliances, digital products (such as UAV, mobile phone, computer, notebook, camera, handheld head, car refrigerator, etc.), long-distance self-driving travel, outdoor camping, lighting, picnic, wild fishing, environmental monitoring, geological exploration, car electricity, medical equipment and other scenes.

#### Product Specification

|                               |                                                                                                                                                                                                                                                                                                             |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Power AC                | 1000W                                                                                                                                                                                                                                                                                                       |
| Capacity                      | 1008Wh (48V/21Ah or 3.2V/31500mAh)                                                                                                                                                                                                                                                                          |
| Battery type                  | LiFePO4                                                                                                                                                                                                                                                                                                     |
| Power Indicate                | LCD display                                                                                                                                                                                                                                                                                                 |
| LCD Display                   | Battery remaining capacity, Battery fault, total output power, Over temperature, input power, Charge time, discharge time                                                                                                                                                                                   |
| AC Input                      | 500W                                                                                                                                                                                                                                                                                                        |
| AC fully Charging Time        | About 2-3H                                                                                                                                                                                                                                                                                                  |
| Solar Controller Model        | MPPT                                                                                                                                                                                                                                                                                                        |
| Solar Charging Input          | 400W max                                                                                                                                                                                                                                                                                                    |
| Charging Temperature Range    | 32~104 (0 ~40 )                                                                                                                                                                                                                                                                                             |
| USB Output                    | Type-C output: PD 100W<br>USB-A output: QC3.0 (18W/5V3A, 9V2A, 12V1.5A) *3 (total 54W)                                                                                                                                                                                                                      |
| Cigarret Lighter output       | 12V/10A (120W)                                                                                                                                                                                                                                                                                              |
| DC output                     | 12V/5A/DC5521*2 (total 120W)                                                                                                                                                                                                                                                                                |
| LED light                     | 6-10W<br>SOS, flashlight                                                                                                                                                                                                                                                                                    |
| AC Output                     | Output waveform: pure sinewave<br>Output voltage: 110V (US/JP) or 220V (EU/UK/AU/CN) (AC output voltage and frequency are customized, according to different countries and regions. Please refer to the actual product)<br>Output frequency: 50/60Hz<br>AC continuous output<br>AC continuous output: 2000W |
| Discharging Temperature Range | 14~104 (-10~40 )                                                                                                                                                                                                                                                                                            |
| Product size/Weight           | 328*221*263mm/about 11Kg                                                                                                                                                                                                                                                                                    |
| Carton Size/Weight            | 32.5*25*36.5CM/about 13.3Kg/1PCS                                                                                                                                                                                                                                                                            |
| Protections                   | over-charging, short-circuit, low-voltage, over-temperature and over-discharging protection                                                                                                                                                                                                                 |
| Color                         | Oranger+gray, Blue+gray, Red+gray, Green+gray                                                                                                                                                                                                                                                               |
| Housing Material              | ABS+PC ( fireproofing V0)                                                                                                                                                                                                                                                                                   |
| Working Temperature           | -15~45                                                                                                                                                                                                                                                                                                      |
| Operation Humidity            | 10%~90%                                                                                                                                                                                                                                                                                                     |
| Standard Package Include      | 1*Q2400 portable power supply, 1*User Manual, color box packaging, 1*MC4 charging cable, 1*vehicle charging cable, 1 AC cable                                                                                                                                                                               |
| Warranty                      | 12 months                                                                                                                                                                                                                                                                                                   |

#### 9 Protections Strictly Abide By Charging Safety

Overcurrent protection  
Short-circuit protection  
Over discharge protection  
Low temperature protection  
High temperature protection  
Overvoltage protection  
Overload protection  
Signal interference protection  
Overcharge protection

# THREE CHARGING METHODS

## Meet the needs of different scenarios

There are three charging methods of AC/Solar/Car charger to meet the requirements of a variety of equipment.



Wall Charger  
700W Max



Solar Charger  
400W Max



Car Charger  
12V

AC full charged  
within **1.5~2.5**  
**Hours**



## Different Sockets Available Upon Your Requests



USA



Japan



EU



UK



China




AU



India



# Function Panel

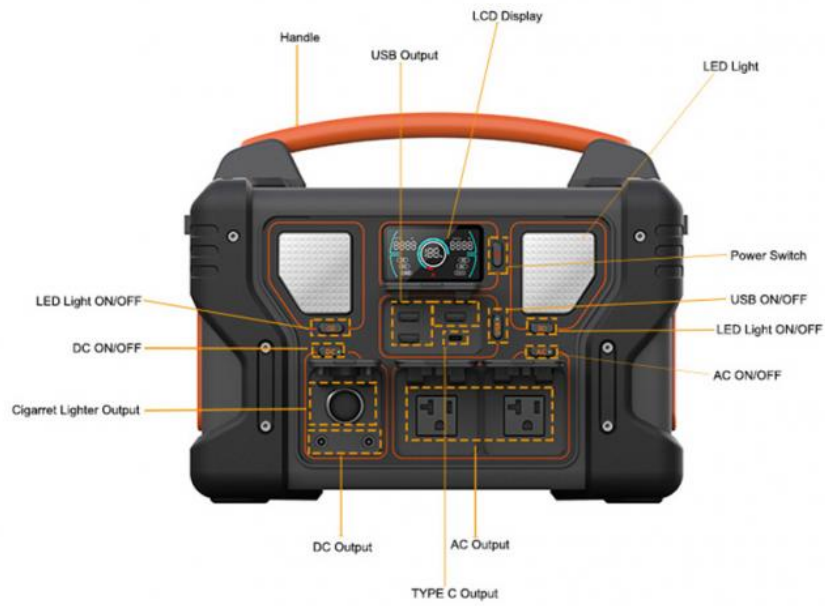



## More use scenarios



**MINKO (SZ) TECHNOLOGY CO., LIMITED**



+8613539872669



yumiko@szminko.com



evstationcharger.com

309 West Lake Industrial Zone, Cuishan Road, Dongxiao Street, Luohu District, SZ